


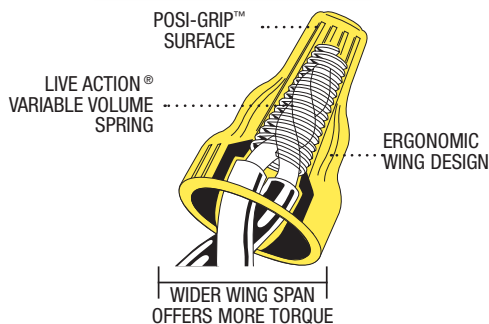

External Cap

- Ergonomic wing design gives you a comfortable grip and more torque than the competition. The ergonomic shape reduces finger fatigue from repetitive installations.
- The ergonomic wing shape allows excellent torque grip for your fingers as well as the option to use a standard 1/2 in. or 13 mm hex driver to help twist the Marrette®.
- Made of tough durable polypropylene and 105°C (221°F) rated to withstand high installation pressures.
- Deep, wide throat ensures full insulation coverage.

Inner Spring

- Range: #22 to #8 AWG, with no pre-twisting.
- The square wire spring construction and funnel design give a positive pressure conductor grip for solid or stranded wires.
- Approved for circuits up to 600 V and lighting fixtures and signs up to 1000 V.
- For copper conductor only.
- Convenient packaging - sized right and job-site ready!

For packaging options, see page D18



Model	Colour	22	20	18	16	14	12	10	8
833	Yellow	Min.: 2 #22 + 1 #20 Max.: 3 #10							
TOOL-WING	Driver for winged Wire connectors (included in all packs of 1000 units +).								

833 wire combinations

Nbr of Cond.	AWG	Nbr of Cond.	AWG
2	10	—	—
3	10	—	—
1	12	2	10
2	12	—	—
2	12	1	10
2	12	1	8
3	12	—	—
3	12	1	10
4	12	—	—
1	14	2	12
1	14	3	12
1	14	4	12
1	14	2	10
2	14	—	—
2	14	1	12
2	14	2	12
2	14	3	12
2	14	1	10
2	14	2	10
2	14	1	8
3	14	—	—
3	14	1	12
3	14	2	12
3	14	1	10
3	14	1	8
4	14	—	—
4	14	1	12
4	14	1	10
5	14	—	—
1	16	2	14
1	16	3	14
1	16	4	14
1	16	2	12

Nbr of Cond.	AWG	Nbr of Cond.	AWG
1	16	3	12
1	16	4	12
1	16	2	10
2	16	—	—
2	16	1	14
2	16	2	14
2	16	3	14
2	16	1	12
2	16	2	12
2	16	3	12
2	16	1	10
2	16	2	10
2	16	1	8
3	16	—	—
3	16	1	14
3	16	2	14
3	16	1	12
3	16	2	12
3	16	1	8
4	16	—	—
4	16	1	14
4	16	1	12
4	16	1	8
5	16	—	—
1	18	1	16
1	18	2	16
1	18	3	16
1	18	4	16
1	18	5	16
1	18	2	14
1	18	1	12
1	18	2	12
1	18	3	12
2	18	—	—

Nbr of Cond.	AWG	Nbr of Cond.	AWG
2	18	1	16
2	18	2	16
2	18	3	16
2	18	4	16
2	18	1	14
2	18	2	14
2	18	1	12
2	18	2	12
2	18	3	12
3	18	—	—
3	18	1	16
3	18	2	16
3	18	3	16
3	18	1	14
3	18	1	12
4	18	—	—
4	18	1	16
4	18	2	16
4	18	1	12
5	18	—	—
5	18	1	12
6	18	—	—
1	20	2	18
1	20	3	18
2	20	1	18
2	20	2	18
2	20	3	18
2	20	1	16
2	20	2	16
2	20	3	16
3	20	—	—
3	20	1	18
3	20	2	18

Nbr of Cond.	AWG	Nbr of Cond.	AWG
3	20	1	16
4	20	—	—
4	20	1	18
4	20	1	16
5	20	—	—
1	22	2	20
1	22	3	20
1	22	4	20
1	22	2	18
1	22	3	18
1	22	4	18
2	22	1	20
2	22	2	20
2	22	3	20
2	22	1	18
2	22	2	18
2	22	3	18
2	22	1	16
2	22	2	16
2	22	3	16
3	22	1	20
3	22	2	20
3	22	1	18
3	22	2	18
3	22	1	16
4	22	—	—
4	22	1	20
4	22	1	18
4	22	1	16
5	22	—	—